



<b>Model</b>	ER3
<b>System</b>	Li-Thionyl Chloride/Inorganic Electrolyte
<b>Nominal Voltage (V)</b>	3.6
<b>Nominal Capacity (mAh)*</b>	1,100
<b>Nominal Discharge Current (<math>\mu\text{A}</math>)</b>	40
<b>Operating Temperature Range (deg. C)</b>	-55 to +85
<b>Weight (g)**</b>	8
<b>Dimensions (mm)**</b>	
<b>Diameter</b>	14.5
<b>Height</b>	29.9
<b>UL Recognition</b>	MH12568
<b>(Technician Replaceable)</b>	

## Characteristics


### ● Discharge Characteristics

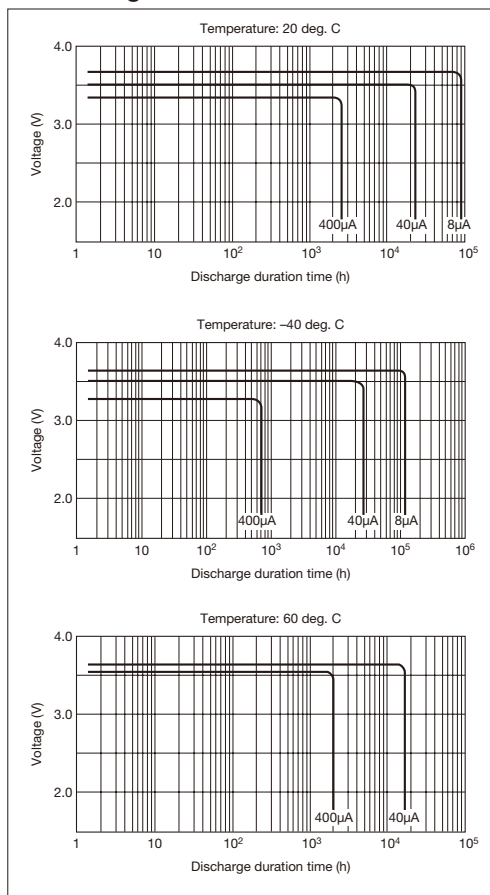

### ● Relationship between Discharge Current and Duration Time

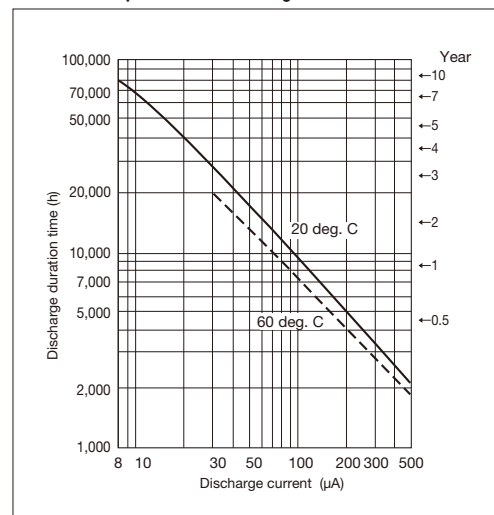

### ● Storage Characteristics

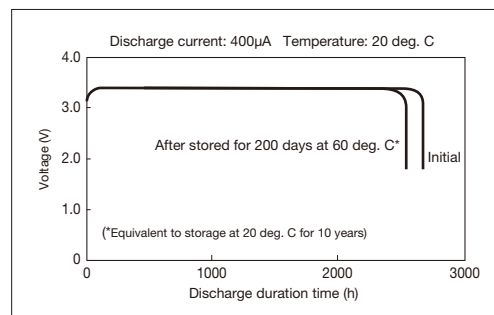

\* Nominal capacity indicates duration until the voltage drops down to 3.0V when discharged at a nominal discharge current at 20 deg. C.

\*\* Dimensions and weight are for the battery itself, but may vary depending on the shape of terminals or other factors.