



| | |
|---|---|
| Model | ER17/33 |
| System | Li-Thionyl Chloride/Inorganic Electrolyte |
| Nominal Voltage (V) | 3.6 |
| Nominal Capacity (mAh)* | 1,600 |
| Nominal Discharge Current (μA) | 75 |
| Operating Temperature Range (deg. C) | -55 to +85 |
| Weight (g)** | 13 |
| Dimensions (mm)** | |
| Diameter | 17.0 |
| Height | 35 |
| UL Recognition | MH12568 |
| (Technician Replaceable) | |

Characteristics


● Discharge Characteristics

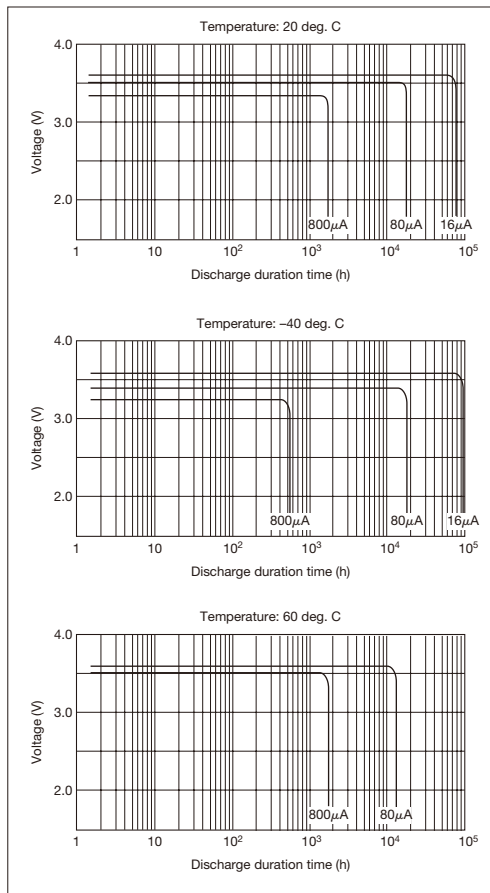

● Relationship between Discharge Current and Duration Time

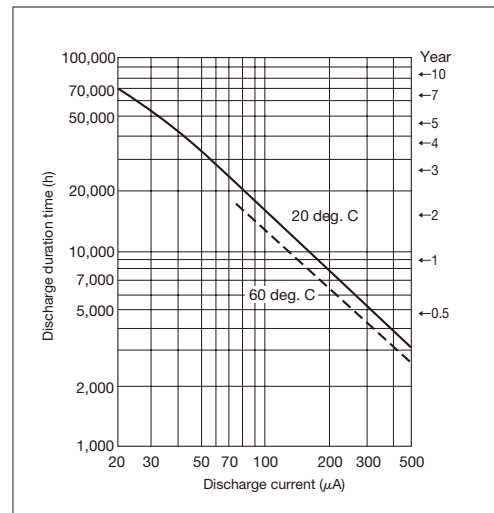

● Storage Characteristics

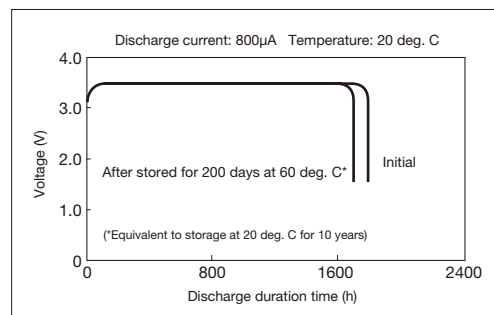

* Nominal capacity indicates duration until the voltage drops down to 3.0V when discharged at a nominal discharge current at 20 deg. C.

** Dimensions and weight are for the battery itself, but may vary depending on terminal specifications and other factors.